









Patented temperature compensation



Advanced sensors measure temperature, salt level and flow



Simple installation and service



Operates at water temperature up to 104° F/40° C



Automatic model detection



Operates at flow rates as low as 20 gpm (4.5 m<sup>3</sup>/h)



Automatic cover connection



24 hour boost cycle








California residents visit autopilot.com for Proposition 65 information.



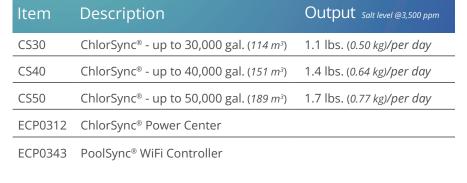

## Control your ChlorSync® right through your phone and get advanced functionality when paired with the PoolSync® Pa

- View current salt level and water temperature
- · See how much salt to add, when needed
- · Receive notification when the cell needs to be cleaned
- Be alerted should the unit need any attention

